


## Datasheet of latio 4.6

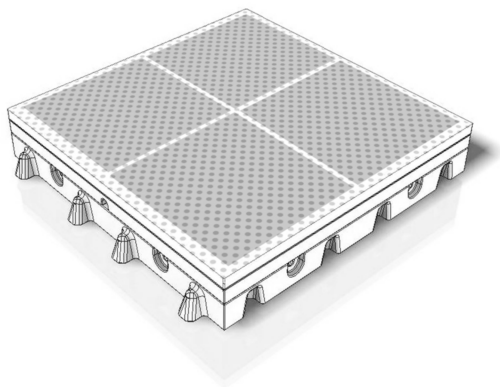

### latio 4.6 Solar Paving

|                                      |                               |
|--------------------------------------|-------------------------------|
| Sizes (mm)                           | 340x340x61                    |
| Covered area (m2)                    | 0,1156                        |
| Wearing course material              | Tempered glass                |
| Wearing course grade (anti slipping) | DIN 51 130 - R10              |
| Base material                        | Recycled polymer composite    |
| Max load (kg/pcs)                    | 1800                          |
| Available cell colours               | Black                         |
| Cell size (mm)                       | 156x156                       |
| Cells (pcs)                          | 4                             |
| Cell type                            | Monocrystalline               |
| Power (pW/pcs)                       | 18                            |
| Power (pW/m2)                        | 155                           |
| Cell's efficiency                    | 0,19                          |
| Anti-reflection                      | Silicon nitride               |
| Cell's performance warranty (years)  | 20                            |
| International protection (IP)        | ip68                          |
| Necessary support                    | Foundation                    |
| Field of application                 | Sidewalks, squares, driveways |
| Weight (kg/pc)                       | 8,5                           |